



## BACK PRESSURE REGULATOR LPS® L

lined design  
angle design DN 25

### Application




The self contained low pressure reducing regulators and back pressure regulators controls pressure in mbar range. Applications are for inert gas tank blanketing, reactors, centrifuges and agitating tubs with inert gas such as nitrogen. The regulators are designed to meet requirements in the chemical, pharmaceutical and biotechnology industries and are particularly corrosion resistant and reliable.

### Design

The large proportioned, spring-loaded diaphragm actuator with directly-controlled valve seat ensures precise control with low hysteresis. The regulators function without auxiliary power supply. High overpressure strength and safe regulator function is achieved by means of the supported diaphragm with long spindle guide. The back pressure regulator has a low degree of clearance volume and good self-draining.

### Description

The body is made out of SS 316L and lined with ETFE. Wetted parts are only manufactured in ETFE-lined, PTFE, FFKM, Tantalum, or Titanium. The diaphragm and seals are made of PTFE or FFKM and the regulator trim is made out of Tantalum or Titanium and perfluoroelastomer FFKM seat as standard. These materials guarantee high corrosion resistance and excellent sealing, even at zero flow. For all materials FDA conformity can be supplied. The design has a low degree of clearance volume and is good in self-draining. On request, further materials are available. The ETFE liner thickness can be from 0.8 to 3.0 mm depending on the need.

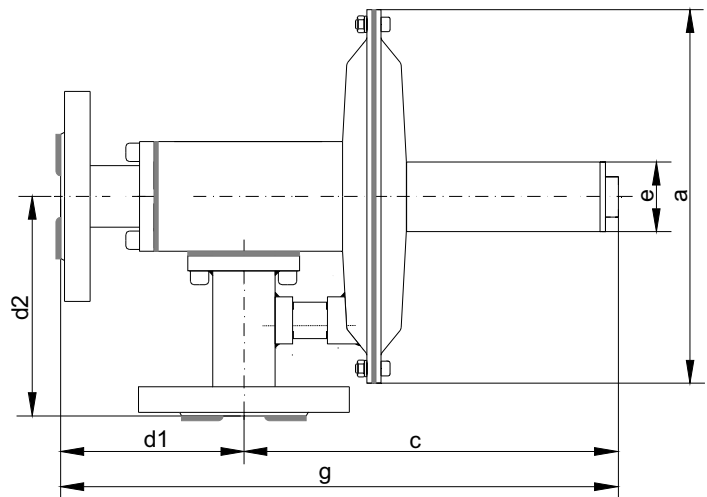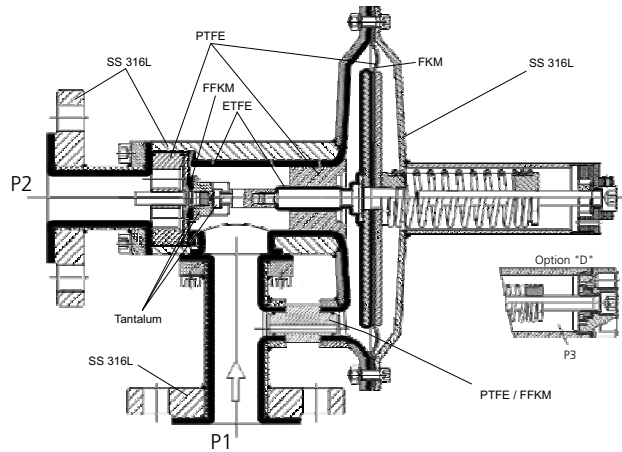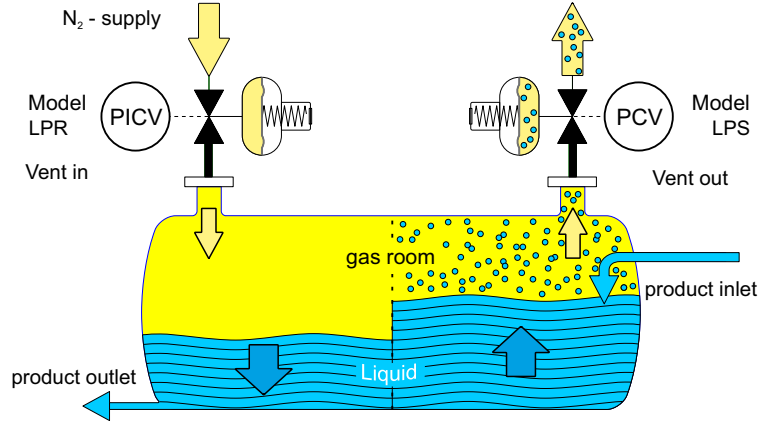

Technical data	
<b>Nominal diameter:</b>	DN 25 / 1"
<b>Regulating range P2:</b>	L.. to 500 mbar D (pressure difference) to 4 bar = P3
<b>Inlet pressure P1:</b>	max. 6 bar ETFE - lined version
<b>Vakuum proof</b>	
<b>Pressure connections:</b>	DN 25 DIN EN 1092-1 ANSI B 16,5 1" 150 lbs
<b>Weight:</b>	6,2 kg to 12,2 kg
<b>Temperature:</b>	-20 ° to +150 °C for all material combination (Dependent on pressure)
<b>Testing and inspection:</b>	According to IEC 60534-4
<b>Pressure tightness:</b>	Bubble tight sealing category VI

Model dimensions	pressure connection	a	c	g	d1 x d2	e	f Option "D"
LPSL-025-.-.-.-.-.-.-.-.	DN 25 DIN EN 1092-1 ANSI B 16,5 1" 150 lbs	ø204	200	300	100 x 120	ø38	G 1/4" female thread



## MODEL CODING LPS<sup>®</sup>L

lined design  
angle design DN 25

1			2			3			4			5			6			7		
Design			Nominal diameter DN/ pressure connection			Flow capacity			Regulating pressure range			Material			Options			Specials		
LP	S	L	-	025	.	-	..	-	...	-	...	-	...	-	.	-	-	Xn		

### 2 Nominal diameter DN/ Pressure connection

D Flange: DN25 DIN EN 1092-1  
A Flange: ANSI B 16,5 1" 150 lbs

### 3 Flow capacity

20 Seat  $\varnothing 20$  mm kv = 5.60

### 4 Regulating pressure range P2 (mbar)

L01	2 - 10	L10	16 - 100
L02	4 - 20	L20	30 - 200
L05	8 - 50	L50	80 - 500

### 5 Material

	Housing/ internal components		Seat seal		Diaphragm
M	1.4435 (SS 316L) ETFE lined/Tantalum	C	FFKM FDA conform	P	*PTFE
N	1.4435 (SS 316L) ETFE lined/Titanium				

The housing/internal components/spring housing, seat and diaphragms can be combined in any order.

\* PTFE with FKM back-up diaphragm.


Other materials available on request.

### Flow table for seat 20 [flow quantities in Nm<sup>3</sup>/h]

P1 [mbar rel.]	2	5	10	16	25	40	50	80	100	160	250	400
Atm.	8	12	18	22	28	35	39	50	55	70	88	110
P2 [mbar rel.]												
-2	11	15	19	23	29	36	40	50	55	70	88	110
-5	15	17	21	25	30	37	41	51	56	71	88	110
-10	19	21	25	28	32	39	43	52	58	72	89	111


It is recommended to design for operation at a maximum of 70% of the flow values.  
P1 = regulating pressure

### Pressure / flow characteristic

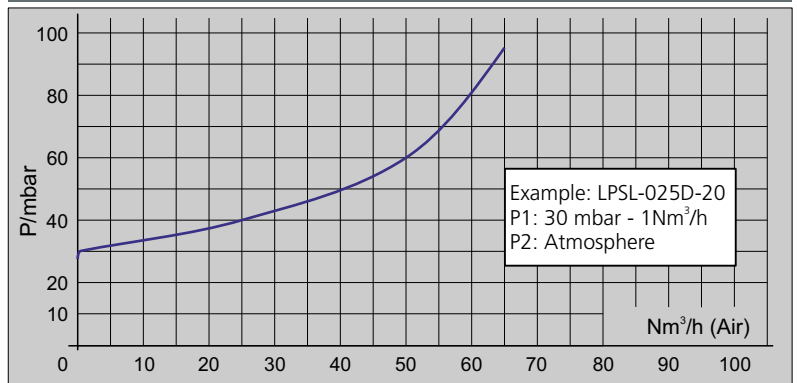

### Installation

The preferred installation position is with vertical diaphragm housing and horizontal input. Pressure fixed unit is adjusted in this position. The output pressure increases by approximately 4 mbar for installation with horizontal diaphragm housing. The installation position must be specified.



### 6 Options

D Differential pressure connection

### 7 Specials

X0 If you require, for example, ATEX, PED, special connections, welding seams ground on the outside, a fixed setting for P2 ..., please enter an X in this field with the number of desired Specials. Each of the specials must be described in writing.  
Xn For special versions and certifications, please contact the manufacturer or the appropriate sales representative.

### Mounting and start up

- Before connecting the pressure regulator please make sure
  - to compare the plant data with the name plate
  - the values marked on the name plate are the values measured during our functional inspection
  - to check the corrosion resistance of the material
  - to blow out impurities in the pipes
  - to note the flow direction – it is marked with an arrow on the housing
  - to open inlet pipes slowly.
- LPSL adjust reduced pressure: (Relative pressure)
  - set a light flow (1Nm<sup>3</sup>/h). Set the pressure +/- as required using a hexagonal wrench
  - the setting can be secured with a seal.
- Adjust the LPSL differential pressure (-D) with the servo-regulator
  - if the D-connection is pressurised with the servo-pressure, the working pressure is added by the servo-pressure.